

XGS28E

Telescopic boom lift

FEATURES

MEASUREMENTS

28.2m working height
Up to 300/460kg lift capacity

PRODUCTIVITY

2.4m x 0.9m steel platform
4 driving wheels
2 steering wheels
40% theoretical gradeability
Axle balance system
Solid rubber tires
Platform automatic leveling system
160° platform rotation
Fully proportional multi-function controls
Hydraulic oil cooler
Drive enable
Hourmeter record
Tilt alarm
Lift and lower alarm
Drive alarm
360° continuous turntable rotation
Lockable turntable cover
High/Slow speed mode
Turntable control box
Engine status display
Steering lever control
Flashing beacon
Emergency power unit
12V DC emergency power

POWER


Engine protection devices
Kubota Euro stage V emission

OPTIONS

Foam-filled rough terrain tires
Tool tray
Platform working light
AC power to the platform
Platform anti-collision device



Work Curve Graph

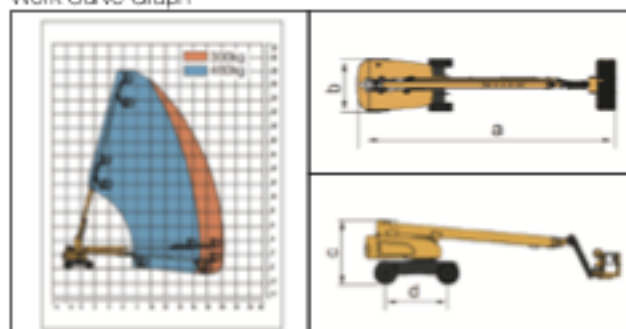

Item	Unit	XGS28E
Working Height	m	28.2
Platform Height	m	26.2
Working radius	m	23
Lift capacity	kg	300/460
Boom luffing range	°	-5~+75
Fly jib luffing range	°	-64~+70
Turntable rotation	°	360
Platform rotation	°	160
Tailswing	mm	1600
Drive Speed	km/h	6.1
Turning Radius (inside)	m	3.6
Turning Radius (outside)	m	6.7
Ground clearance	mm	310
Gradeability	%	40
Tires	-	385/45-28
Power source	-	Kubota V2607
Rated power	kW(r/min)	48/2400
Fuel tank	L	180
Hydraulic tank	L	210
Weight	kg	18300
Platform size	mm	2400x900
a Length	mm	12300
b Width	mm	2490
c Height	mm	3050
d Wheelbase	mm	3000